

**Butt Shaped Insulated Terminal**


**Specifications**




ITEM.NO.	AWG	mm <sup>2</sup>	Dimension (mm)			Max	Color
			I	DØ	L		
BV1.25	22~16	0.5~1.5	15.0	1.7	26.0	19A	Red
BV2	16~14	1.5~2.5	15.0	2.3	26.0	27A	Blue
BV5.5	12~10	4~6	15.0	3.4	26.0	48A	Yellow
BV8	#8	6~10	21.0	4.5	32.0	62A	Red
BV14	#6	10~16	26.0	5.8	42.0	88A	Blue
BV22	#4	16~25	29.0	7.7	50.0	115A	Yellow
BV38	#2	35~50	32.0	9.4	55.0	160A	Red

ITEM.NO.	AWG	mm <sup>2</sup>	Dimension (mm)			Max	Color
			I	DØ	L		
PVT1.25	22~16	0.5~1.5	8.0	1.7	16.0	19A	Red
PVT2	16~14	1.5~2.5	8.0	2.3	16.0	27A	Blue
PVT5.5	12~10	4~6	8.5	3.4	20.5	48A	Yellow

ITEM.NO.	Dimension (mm)			Wire Range		
	I	DØ	dØ	Single (mm)	Twin (mm <sup>2</sup> )	A.W.G
B-1.25	16.5	3.3	1.9	0.57~1.44	0.25~1.65	22~16
B-2	16.5	4.0	2.6	1.44~1.82	1.04~2.63	16~14
B-5.5	16.5	5.5	3.7	1.82~2.89	2.63~6.64	12~10
B-8	22.5	7.1	5.1	2.89~3.56	6.64~10.52	8
B-14	27.5	9.0	6.4	3.56~4.62	10.52~16.78	6
B-22	30.5	11.4	8.2	4.62~5.81	16.78~26.66	4
B-38	33.5	13.3	10.1	5.81~7.34	26.66~42.42	2
B-60	36.0	15.4	12.0	7.34~8.26	42.42~60.57	1/0
B-70	37.8	17.4	14.0	8.26~9.27	60.57~76.28	2/0
B-80	39.5	19.4	15.4	9.27~10.41	76.28~96.3	3/2
B-100	39.5	22.0	17.6	10.41~11.68	96.6~117.2	4/0
B-125	43.4	24.1	19.2	10.01~12.7	107.2~130.4	4/0
B-150	55.5	26.0	20.9	11.68~13.8	117~152.05	250~300MCM
B-180	58.5	28.6	22.0	13.8~15.6	152.05~192.6	300~350MCM
B-200	64.5	32.5	25.7	15.6~17.5	192.6~242.2	400MCM
B-250	64.5	32.5	25.7	15.6~17.5	192.6~242.2	400MCM
B-325	73.5	37.0	29.0	17.5~20.3	242.2~325	500~600MCM

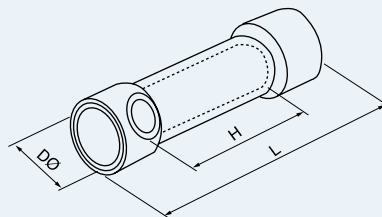

Butt Insulated Terminal

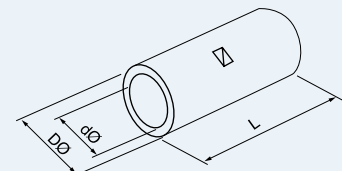

Butt Terminal