

## Is Now Part of



## ON Semiconductor®

## To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



November 2014

# BC546 / BC547 / BC548 / BC549 / BC550 NPN Epitaxial Silicon Transistor

#### **Features**

• Switching and Amplifier

• High-Voltage: BC546, V<sub>CEO</sub> = 65 V

• Low-Noise: BC549, BC550

• Complement to BC556, BC557, BC558, BC559, and BC560



## **Ordering Information**

Part Number	Marking	Package	Packing Method			
BC546ABU	BC546A	TO-92 3L	Bulk			
BC546ATA	BC546A	TO-92 3L Amn				
BC546BTA	BC546B	3 TO-92 3L A				
BC546BTF	BC546B	TO-92 3L	Tape and Reel			
BC546CTA	BC546C	TO-92 3L	Ammo			
BC547ATA	BC547A	TO-92 3L	Ammo			
BC547B	BC547B	TO-92 3L E				
BC547BBU	BC547B	B TO-92 3L Bu				
BC547BTA	BC547B	7B TO-92 3L An				
BC547BTF	BC547B	47B TO-92 3L Tape				
BC547CBU	BC547C	TO-92 3L	Bulk			
BC547CTA	BC547C	TO-92 3L	Ammo			
BC547CTFR	BC547C	TO-92 3L Tape ar				
BC548BU	BC548	TO-92 3L Bu				
BC548BTA	BC548B	TO-92 3L Amr				
BC548CTA	BC548C	TO-92 3L Ammo				
BC549BTA	BC549B	TO-92 3L Ammo				
BC549BTF	BC549B	TO-92 3L Tape and Rec				
BC549CTA	BC549C	TO-92 3L Ammo				
BC550CBU	BC550C	TO-92 3L	Bulk			
BC550CTA	BC550C	TO-92 3L	Ammo			

1

### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}\text{C}$  unless otherwise noted.

Symbol	Param	Value	Unit			
		BC546	80			
$V_{CBO}$	Collector-Base Voltage	BC547 / BC550	50	V		
		BC548 / BC549	30			
		BC546	65			
$V_{CEO}$	Collector-Emitter Voltage	BC547 / BC550	45	V		
		BC548 / BC549	30			
V	Emitter-Base Voltage	BC546 / BC547	6	V		
V <sub>EBO</sub>	Emitter-base voltage	BC548 / BC549 / BC550	5	]		
I <sub>C</sub>	Collector Current (DC)		100	mA		
P <sub>C</sub>	Collector Power Dissipation		500	mW		
TJ	Junction Temperature		150	°C		
T <sub>STG</sub>	Storage Temperature Range		-65 to +150	°C		

#### **Electrical Characteristics**

Values are at  $T_A = 25$ °C unless otherwise noted.

Symbol		Parameter	Conditions	Min.	Тур.	Max.	Unit			
I <sub>CBO</sub>	Collector Cut-Off Current		$V_{CB} = 30 \text{ V}, I_{E} = 0$			15	nA			
h <sub>FE</sub>	DC Curr	ent Gain	$V_{CE} = 5 \text{ V}, I_{C} = 2 \text{ mA}$	110		800				
\/ (oot)	Collector	-Emitter Saturation	$I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$		90	250	m\/			
V <sub>CE</sub> (sat)	Voltage		I <sub>C</sub> = 100 mA, I <sub>B</sub> = 5 mA		250	600	mV			
\/ (oot)	Poss En	oittor Caturation Valtage	$I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$		700		m\/			
V <sub>BE</sub> (sat)	Dase-Ell	nitter Saturation Voltage	I <sub>C</sub> = 100 mA, I <sub>B</sub> = 5 mA	/	900		mV			
\/ (on)	Base-Emitter On Voltage		$V_{CE} = 5 \text{ V}, I_{C} = 2 \text{ mA}$	580 660 700			mV			
V <sub>BE</sub> (on) Base-Em	iliter On voltage	V <sub>CE</sub> = 5 V, I <sub>C</sub> = 10 mA			720	IIIV				
f <sub>T</sub>	Current Gain Bandwidth Product		$V_{CE} = 5 \text{ V, } I_{C} = 10 \text{ mA,}$ f = 100 MHz		300		MHz			
C <sub>ob</sub>	Output C	apacitance	V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0, f = 1 MHz		3.5	6.0	pF			
C <sub>ib</sub>	Input Capacitance		$V_{EB} = 0.5 \text{ V}, I_{C} = 0, f = 1 \text{ MHz}$		9		pF			
		BC546 / BC547 / BC548	$V_{CE} = 5 \text{ V}, I_{C} = 200 \mu\text{A},$		2.0	10.0				
NF	Noise	BC549 / BC550	$f = 1 \text{ kHz}, R_G = 2 \text{ k}\Omega$		1.2	4.0	dB			
INF	Figure	BC549	$V_{CE} = 5 \text{ V}, I_{C} = 200 \mu\text{A},$		1.4	4.0	uВ			
		BC550	$R_G = 2 \text{ k}\Omega$ , f = 30 to 15000 MHz		1.4	3.0				

## **h**<sub>FE</sub> Classification

Classification	A	В	С		
h <sub>FE</sub>	110 ~ 220	200 ~ 450	420 ~ 800		

## **Typical Performance Characteristics**




Figure 1. Static Characteristic




Figure 3. DC Current Gain




Figure 5. Output Capacitance




Figure 2. Transfer Characteristic




Figure 4. Base-Emitter Saturation Voltage and Collector-Emitter Saturation Voltage





Figure 6. Current Gain Bandwidth Product

## **Physical Dimensions**

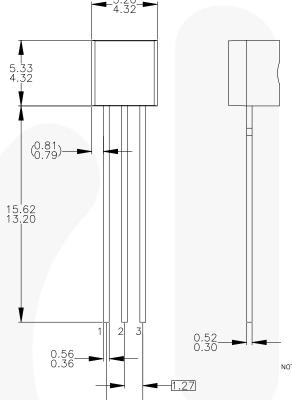

2.54

2 3 

\_4.19 3.05


NOTES: UNLESS OTHERWISE SPECIFIED


- DRAWING WITH REFERENCE TO JEDEC TO-92 RECOMMENDATIONS.
  ALL DIMENSIONS ARE IN MILLIMETERS.
  DRAWING CONFORMS TO ASME Y14.5M-1994.
  TO-92 (92,94,96,97,98) PIN CONFIGURATION:

	Z Z		92			94			96			97			98		ı
	ā	Ρ	F	М	Ρ	F	М	В	F	М	Ρ	F	М	Ρ	F	М	i
	1	Е	S	S	Ε	S	S	В	D	G	С	G	D	С	G	D	ı
	2	В	D	G	С	G	D	Ε	S	S	В	D	G	Ε	S	S	i
	3	С	G	D	В	D	G	С	G	D	Ε	S	S	В	D	G	i
66 13	LEGEND: P — BIPOLAR E — EMITTER D — DRAIN F — JFET B — BASE S — SOURCE M — DMOS C — COLLECTOR G — GATE																
		E) F)	,	PIN ARE	CO INT	NFIC ERC	GE GUR/ CHAI LEN.	ATIO NGE	N [ AGL	RAI E A	N " T JI	D" FET	AND "F"	SC	UR	CE N.	"S"

Figure 7. 3-Lead, TO-92, JEDEC TO-92 Compliant Straight Lead Configuration, Bulk Type

## Physical Dimensions (Continued)

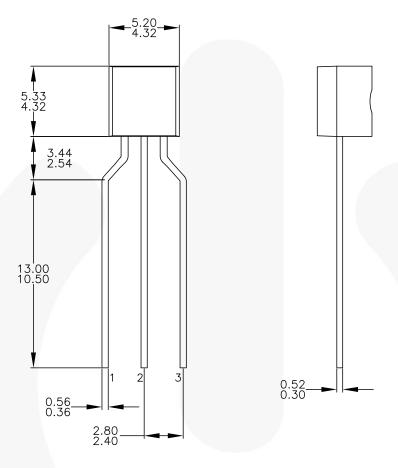



NOTES: UNLESS OTHERWISE SPECIFIED

- DRAWING CONFORMS TO JEDEC MS-013, VARIATION AC. ALL DIMENSIONS ARE IN MILLIMETERS. DRAWING CONFORMS TO ASME Y14.5M-2009. DRAWING FILENAME: MKT-ZAO3FREV3. FAIRCHILD SEMICONDUCTOR.

Figure 8. 3-Lead, TO-92, Molded, 0.2 In Line Spacing Lead Form, Ammo, Tape and Reel Type





#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

 AccuPower™
 F-PFS™

 Awinda®
 FRFET®

 AX-CAP®∗
 Global Power Resource

 Stock
 Stock

 BitSiC™
 GreenBridge™

 Build it Now™
 Green FPS™

 CorePLUS™
 Green FPS™

CorePLUS™ Green FPS™ e-Series™

CorePOWER™ Gmax™ CROSSVOLT™ GTO™

CTL™ IntelliMAX™

Current Transfer Logic™ ISOPI ANAR™

DEUXPEED® Making Small Speakers Sound Louder

 Dual Cool™
 and Better™

 EcoSPARK®
 MegaBuck™

 EfficientMax™
 MICROCOUPLER™

 ESBC™
 MicroFET™

 MicroPak™
 MicroPak™

MicroPak2™ Fairchild® MillerDrive™ Fairchild Semiconductor® MotionMax™ FACT Quiet Series™ MotionGrid® FACT<sup>®</sup> FAST® MTi<sup>®</sup> MTx® FastvCore™ MVN® FFTBench™ mWSaver® **FPS™** OptoHiT™

OPTOPLANAR®

® PowerTrench® PowerXS™

Programmable Active Droop™

QFĒT<sup>®</sup>
QS™
Quiet Series™
RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

SPM®
STEALTH™
SuperFET®
SuperSOT™-3
SuperSOT™-6
SuperSOT™-6
SuperSOT™-8
SuperSOT™-8
SuperSOT™-8
SuperSOT™-8
SuperSOT™-8
SuperSOT™-8
SuperSOT™-8
SuperSOT™-8

SYSTEM GENERAL®

TinyBoost®
TinyBuck®
TinyCalc™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPower™
TinyPwM™
TinyWire™
TranSiC™

TriFault Detect™
TRUECURRENT®\*
µSerDes™

Scripes"
UHC®"
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™
XS™
Msens™
仙童™

OPTOLOGIC®

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <a href="http://www.fairchildsemi.com">http://www.fairchildsemi.com</a>, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OF CIRCUIT DESCRIBED HEREIN, NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

#### As used herein

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 172

<sup>\*</sup> Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Fairchild Semiconductor:

BC549C

## onsemi:

BC549BTAR BC549C\_J35Z BC549B\_J35Z BC549\_J35Z BC549C\_Q BC549B\_Q BC549BTAR\_Q BC549\_Q BC549CTA\_Q BC549BBU BC549TFR BC549CTF BC549TAR BC549TF BC549ATA BC549ABU BC549B\_D11Z BC549B\_D75Z BC549C\_D11Z